

Marxan Tutorial

Contents

1.	Background Information	2
1.1	Why Marxan?	2
1.2	What actually <i>is</i> Marxan?	3
1.2	How does Marxan work?	3
1.2.1	In a nutshell.....	3
1.2.2	A little more about the scoring of planning units	3
1.3	What information does Marxan use?	4
2.	Using the Interface.....	5
2.1	Getting Started.....	5
2.2	Manipulating Key Variables	6
2.2.1	Global Parameters	6
2.2.2	Property Exclusions.....	8
2.2.2	Protection Targets.....	9
2.2.3	Species Penalty Factor	11
2.2.4	Connectivity	12
2.2.5	Number of Iterations	12
2.3	Running Marxan and Interpreting the Results.....	13
2.3.1	Scenario name.....	13
2.3.2	Summary Tables.....	13
2.3.3	Output plots	15
2.4	Downloading and Viewing MARXAN results in ArcMap	16
3.	References	17
4.	Additional Resources	18
5.	Appendices.....	19
	Appendix A. Old Forest Community Occurrence Map.....	19
	Appendix B. Savannah Community Occurrence Map	20
	Appendix C. Wetland Community Occurrence Map.....	21
	Appendix D. Human Commensal Birds Community Occurrence Map.....	22
	Appendix E. Old Forest and Savannah Beta Diversity Map	23
	Appendix F. Garry Oak Ecosystem Plant Native Species Richness Map	24
	Appendix G. Example Maps - Locking In vs. Not Locking In Parks	25

Marxan Tutorial

Produced for the Coastal Douglas-Fir Conservation Partnership

<http://arcese.forestry.ubc.ca/marxan-tool/>

1. Background Information

1.1 Why Marxan?

Marxan is a problem solving tool that is used to help inform decisions on landscape-scale conservation planning. As part of a systematic planning process, Marxan contributes towards a transparent, inclusive and defensible decision making process. Historically, conservation decision-making has often focused on evaluating land parcels opportunistically as they become available for purchase, donation, or under threat. This was often done without a complete understanding of how their acquisition might contribute to targets for biodiversity conservation or the degree to which they are likely to maximize return on the investment of scarce conservation dollars and time.

Using Marxan to simulate alternative reserve designs should help you to prioritize conservation actions at the landscape level, and allow you to specify the targets such as focal or indicator species richness, ecosystem representation, complementarity and connectivity, and to also minimize the overall costs of conservation acquisitions. This tutorial will show you how to use Marxan to identify existing gaps in biodiversity protection, to identify candidate areas to include in a growing reserve system, and to provide decision support based on a clear and repeatable set of conservation targets.

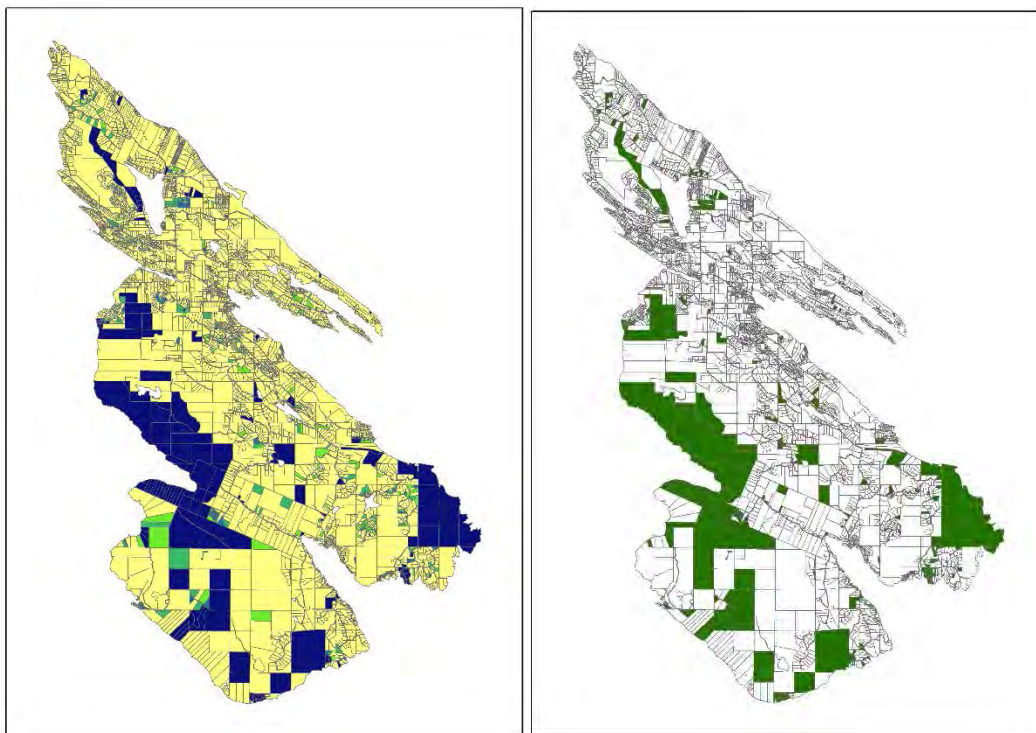


Figure 1. Maps of Salt Spring Island after running a Marxan simulation of 100 runs, with a 17% target for all conservation features, boundary length modifier of 1, and species penalty factor of 3. The maps on the left indicates the frequency with which particular parcels were selected (% of 100 runs), with dark blue indicating properties that were nearly or always part of

the solution, and yellow properties never selected. This output is often thought of as the portfolio of candidate reserves for acquisition, stewardship or owner contact by managers. The figure on the right indicates the 'reserve design' Marxan returned as the 'best solution' to the input goals and constraints. In this case, the conservation plan that achieved the highest overall biodiversity score at the lowest overall cost (based here on 2014 BC Assessments).

1.2 What actually *is* Marxan?

Marxan is a computer application that runs an algorithm on a user-defined data set and returns a solution in the form of a table of land parcels. These parcels form a 'near optimal' balance of input targets and costs. Marxan is capable of analyzing large, complex datasets to find near-optimal solutions because it uses an algorithm called "**simulated annealing**" (default setting, with others possible), which selects properties that *maximize* progress towards your biodiversity goals while *minimizing* acquisition or other user-controlled costs. It's important to note that in its basic form, Marxan has no graphical interface, it just does the computing. We have designed a web-based graphical user interface that lets you set Marxan parameters and returns a spatially linked solution file that you can download to ArcMap and view. In this tutorial, we will introduce you to our user interface, explain how to manipulate key variables and gain an understanding about the application of output files in support of your planning decisions. It is not essential to understand how the algorithm works to use Marxan, but those wishing to gain a better technical understanding should consult Marxan's User Manual.

1.2 How does Marxan work?

1.2.1 In a nutshell

After you specify your conservation targets and objectives (e.g., area to be conserved), Marxan will start by assigning scores to planning unit configurations in the sample space. This score is based on that particular configuration's ability to meet the conservation objectives while minimizing the cost: the lower the score, the better. Marxan will then compare a huge number of configurations (it would be virtually impossible to compare them all) and find the one with the lowest overall score. This is your solution. You can repeat the process as many times as you want: the more times you do, the more confident you can be that you have found a near optimal solution.

1.2.2 A little more about the scoring of planning units

The score that Marxan assigns to each planning unit configuration is based on a mathematical formula called the **objective function**. The complete formula is:

$$\begin{aligned} \text{Score of the configuration being tested} = & (\sum \text{Cost}) + \\ & + (\text{Boundary Length Modifier} \times \sum \text{Boundary Length of the reserve system}) \\ & + (\sum \text{Species Penalty Factor} \times \text{Penalty incurred for unmet targets}) \end{aligned}$$

Cost

By costs, we are referring to the cost of including that particular set of planning units in a configuration. Depending on the nature of your project, cost could be calculated as the area of planning units, the costs of ongoing management, opportunity costs of displaced commercial activities, costs to industry, tourism, and recreation from displaced activities, or acquisition cost. The lower the cost of a unit, the lower the score will be and the more likely it is that the planning unit will be included in the solution. Marxan then summarizes the cost of all of the selected planning units and this is incorporated into the score.

Connectivity

The boundary length of the reserve system is way of quantifying the *connectivity* of a configuration of planning units. It is a combination of the total length of the edges of the selected planning units, and the weight that you choose to give to this value. This weighting is known as the **boundary length modifier (BLM)**. Essentially, If you choose to place importance on the boundary length (i.e. you set the boundary length modifier to a value greater than 0), then configurations with many small and isolated patches will have higher scores. Marxan works to find the solution with the lowest score, so your reserve system will have a more clumped distribution. For this tutorial, it will be important to understand the boundary length modifier and the consequences of constraining boundary length on the “near optimal solution” that Marxan produces. Skip ahead to section 2.2.4 for instructions on the practical use of the BLM. See section 2.5 for examples of this parameter in practice.

Species Penalty Factor

The piece of the scoring formula is the penalty incurred for unmet targets. This is the sum of the user-defined penalty for not meeting the target and the weight that you choose to give this value. This weighting is known as the **species penalty factor (SPF)**. As the user, you are in charge of setting how big the penalty should be. When a planning unit configuration fails to meet a conservation target (e.g. it does not contain a certain level of richness or a target species), then it will receive a penalty and this will increase its score by a magnitude proportional to the size of the SPF. As a result, it is less likely to represent the final solution. Skip ahead to section 2.2.3 for instructions on the practical use of the SPF. See section 2.5 for examples of this parameter in practice.

1.3 What information does Marxan use?

In order to work, Marxan needs to know your project objectives and study area well, and this input data needs to be organized into specific file types. The key information it requires is:

1. Your project area and a list of all of the planning units contained within it, as well as their cost.
2. A list of target conservation features (species, habitats, soil types)
3. A clearly defined objective or series of objectives (ex. 30% of all grizzly bear habitat)
4. How much of each conservation feature is contained within each planning unit

The user interface we use in this tutorial already contains all of the important input information, so it is not necessary to understand the specifics how the data is organized. However, it will be important to understand how to organize your data into input files if you want to run Marxan manually. Most of this information is found from external sources. Some of it, such as boundary length and the conservation features contained within specific planning units, are determined using GIS software such as ArcMap or QGIS. For more information on the input file formats, you can refer to Qmarxan, an excellent tool for assembling basic Marxan input files.

2. Using the Interface

2.1 Getting Started

The interface we use is linked to an external server that already contains all of the important input layers for the Coastal Douglas Fir planning area. This includes the cadastral fabric, cost information, existing parks, and numerous biodiversity indexes such as old forest birds, standing carbon, TEM element occurrence, etc. To connect to the server, go to <http://arcese.forestry.ubc.ca/marxan-tool/> in your internet browser. The password is “**Just4Now**”. You will be directed to the following index page.

Protected: Marxan Tool

Welcome to the portal of running Marxan tools for the CDFCP.

Please use the links below to get to the tool version you want to use.

[CDFCP wide](#)

[Islands Trust Area](#)

[Capital Regional District](#)

[Cowichan Valley Regional District](#)

Each hyperlink directs you to a different subset of the total CDFCP dataset. To look for solutions across the entire CDFCP area, follow the first “**CDFCP wide**” link.

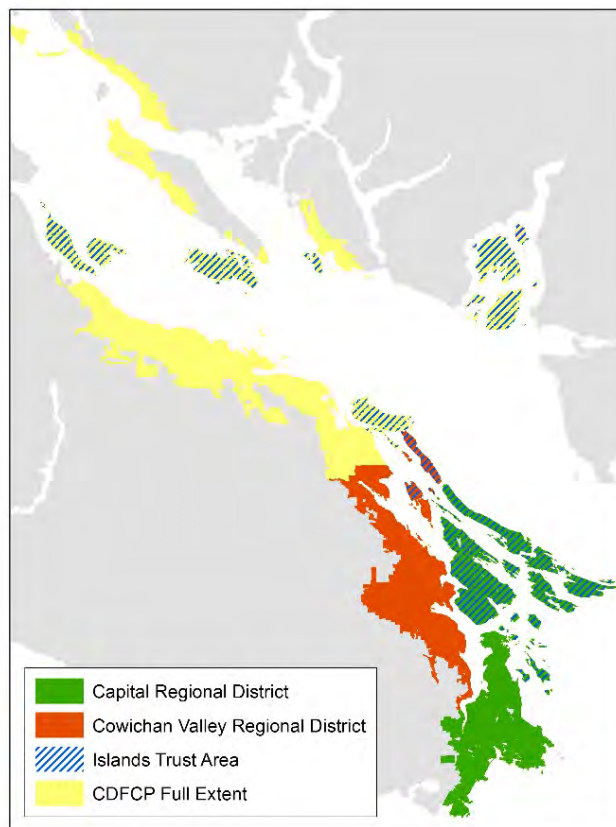


Figure 2. Extent of coverage for the subsets available in the Marxan tool.

An important note about scale:


The spatial scale which you choose has the potential to greatly alter the solutions that Marxan produces. A smaller planning area (ex. Salt Spring Island) has fewer land parcels to choose from, and as a result Marxan may be forced to consider parcels with lower conservation value in order to meet its targets. Expanding your planning area (ex. CRD) could increase the availability of high quality parcels, but this may take the focus away from your area of interest. It is important to consider the consequences of your subset choice before you run Marxan. You may even consider running the same parameters at different scales and comparing the results.

2.2 Manipulating Key Variables

Once you've chosen your data subset, you can begin manipulating the parameters that Marxan uses to inform the objective function (See section 1.2.2). All manipulations are done within the grey sidebar on the left hand side of the screen. Once you run Marxan, the results will be displayed on the right. When you open the tool, the key variables will automatically be set to default settings according to the recommendations contained in the Marxan Good Practices Guide (2010). You can choose to keep them in this format, or manipulate them to better suit your study objectives. We'll go through each section of parameters and explain the options associated with each.

2.2.1 Global Parameters

This section provides Marxan with basic instructions on how it will run.

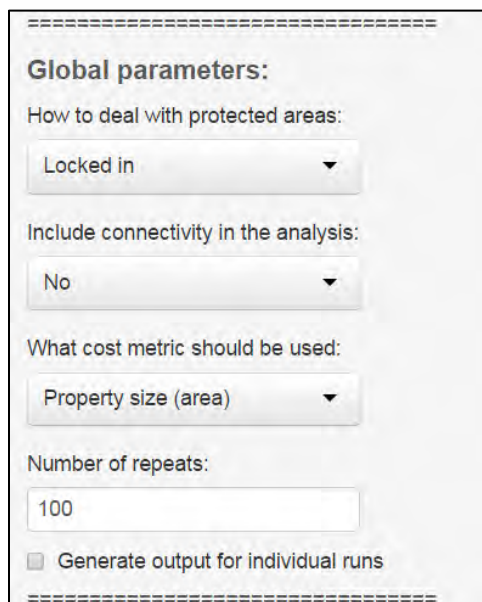

The image shows a grey sidebar titled "Global parameters:" with a dashed border. It contains four settings: "How to deal with protected areas:" with a dropdown menu set to "Locked in"; "Include connectivity in the analysis:" with a dropdown menu set to "No"; "What cost metric should be used:" with a dropdown menu set to "Property size (area)"; and "Number of repeats:" with a text input field containing "100". At the bottom, there is a checkbox labeled "Generate output for individual runs" which is currently unchecked. The sidebar is flanked by dashed lines on both sides.

How to deal with protected areas


Specify if you want to force Marxan to include existing protected areas and parks in the final solution. The two options on the dropdown menu are "Locked In" and "Available". If you choose "Locked In", then every solution Marxan produces will *have* to include the planning units with a protected status. This will be useful if you wish to identify areas to add to an existing reserve system (ex. If your objective is to increase parks from 6% to 17%). For most scenarios "Locked In" will be the default. However, many existing parks may be on areas with low conservation value, and therefore locking in protection areas may produce solutions with a lower total score than an un-constrained solution.

Choosing “Available” will allow Marxan to reject any planning unit from the final solution, regardless of protection status. You may consider using this option if you want to assess the efficacy of the existing reserve system (See Appendix G for example maps).

Include connectivity in the analysis

Specify if you want Marxan to include boundary length in the calculation for the objective function (See section 1.2.2). If you select “No”, then the boundary length modifier will be set to 0 and the boundary length of the configurations being tested will not be considered. This means that there will be no consideration for the spatial clumping of planning units. If you do want to favour solutions with a more clumped distribution, then select “Yes”. You can then select a range of boundary length modifiers to test in the “Connectivity” section (see Section 2.2.4). You might wish to consider this option to avoid selecting isolated land parcels, but keep in mind that it could considerably increase the cost of the final solution.

What cost metric should be used

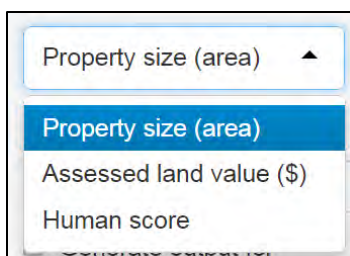

Select the cost metric that best suits the goals of your project. Property size uses land area as a proxy for cost and is useful if you are interested in protecting a certain percentage of the land base (ie. 50%), regardless of specific property costs. Assessed land value is generated using a combination of cadastral data (Integrated Cadastral Information Society of BC) and 2014 land value assessments (BC Assessment Agency). This metric is generally the most easily translated to acquisition cost and is useful for projects with more constrained budgets. Human score is based on a weighting of expert scores for urban and rural areas. As this metric identifies human impact rather than monetary value, only select it if you wish to focus on biodiversity value and disregard acquisition cost.

Number of repeats

Tell Marxan how many runs you would like it to complete, and as a result, how many solutions it will produce in the output. Because large, complex data sets will likely have many “near-optimal” solutions, increasing the number of runs will increase the likelihood that you have found the best possible configuration of land parcels (the one with the lowest score). However, this will also increase the time it takes for Marxan to run, which can be a major constraint with large datasets and limited time. We have set this parameter to a default of 100 runs, which should provide adequate repetition to assess which parcels are selected most frequently in solutions, as well as provide a good “best” solution and minimize run time.

Generate output for individual runs

Check this box if you want the option of looking at the solution table for individual runs. If you are only interested in the overall best run and summed solution (selection frequency) outputs, then leave this box unchecked to improve processing performance.

2.2.2 Property Exclusions

=====

Property exclusions:

If you don't want to exclude properties simply leave values at 0

Road density (km/km²). Marxan will only select properties with road densities smaller than cutoff.

0

5

Parcel size (ha). Marxan will only select properties bigger than cutoff.

0

10

Agriculture density (km²/km²). Marxan will only select properties with agricultural densities smaller than cutoff.

0

1

=====

This section allows you be more specific about the types of land parcels you want included in the solution. Leaving any of the sliders at 0 automatically removes these factors from Marxan analysis.

Road density

Measured as kilometers of **paved** road per square kilometer and calculated for each land parcel in the CDFCP using Terrain Resource Information Management (TRIM) data.

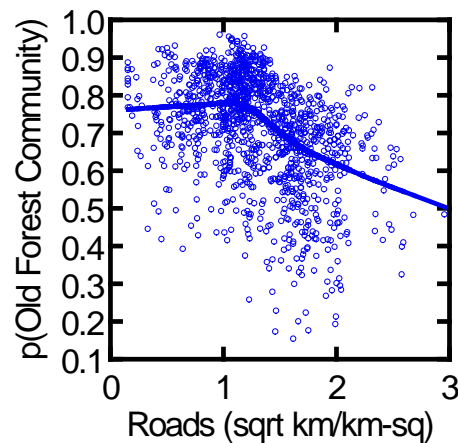


Figure 2. Graph showing relationship between road density and bird species typically associated with old forest communities (stands ≥ 80 years). $N = 1248$, $R = -0.42$.

The probability of encountering an old forest-associated community begins to decline at road densities greater 1 km/km^2 (Figure 2). Excluding properties with high road density (ie. $>1 \text{ km/km}^2$) may therefore help fine-tune your solution. Note: road density is included in the predictive models for native species cover, so setting protection targets for native birds and plants is already indirectly placing a

constraint on the road density (see Section 2.2.2). Therefore you may want to test the usefulness of this function by running Marxan with and without a road density constraint.

Parcel Size

Marxan will consider all land parcels in a solution, including small and isolated forest patches that may be at considerable risk from encroaching development. Unless there are significant conservation features on a property that you are interested in, consider placing a constraint on the minimum allowable size. Users of the tool found that a minimum size of 2 hectares was a good cut-off for identifying securable properties with high conservation value.

Agriculture density

Agriculture includes cultivated fields, orchards, vineyards, and golf courses, and is measured as square kilometers of agriculture per square kilometer. Values were calculated using Terrestrial Ecosystem Mapping (TEM) data.

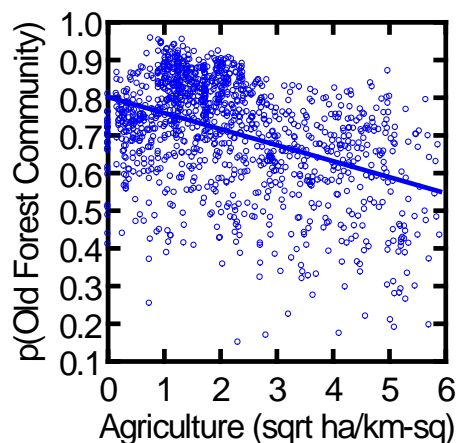


Figure 3. Graph showing relationship between agriculture and bird species typically associated with old forest communities (stands ≥ 80 years). $N = 1248$, $R = (-0.42)$.

Parcels with more than 3 hectares of agriculture per km^2 demonstrate an about 50% decline in the probability of encountering an old forest-associated community. Excluding properties with agricultural density (ie. $>3\text{ha}/\text{km}^2$) may therefore help fine-tune your solution.

2.2.2 Protection Targets

=====

Protection Targets:

Global Protection Target:

17

☐ Set Individual Targets (Global Target will be ignored)


=====

In this section, you specify your overall objectives or a series of objectives for the biodiversity features contained within the CDFCP area. The tool defaults to 17%, which is the global target for terrestrial ecosystem conservation as specified in the 1992 UN Convention on Biological Diversity. This means that Marxan will try to incorporate a minimum of 17% of each biodiversity feature in its solutions. If you wish to vary the protection targets by feature, check the “Set Individual Targets” box and the menu will expand to show all of the biodiversity features for the CDFCP area.

Table 1. Current biodiversity feature layers in the CPFCP tool.

Old Forest Birds	A composite distribution map based on probability of occurrence of birds typically associated with old forest habitat (Schuster and Arcese 2014). See Appendix A.
Savannah Birds	A composite distribution map based on probability of occurrence of birds typically associated with savannah habitat (Schuster and Arcese 2014). See Appendix B.
Wetland Birds	A composite distribution map based on probability of occurrence of birds typically associated with wetland and riparian habitats (Schuster and Arcese, unpublished). See Appendix C.
Human Commensal Birds	A composite distribution map based on probability of occurrence of birds typically associated with urban and rural human landscapes (Schuster and Arcese, unpublished). See Appendix D.
Avoid Human Birds	A composite distribution map based on probability of occurrence of birds that typically avoid urban and rural human landscapes
Bird Beta Diversity	Both savannah and old forest communities. Calculated using the formula $\{\beta = (2+OF+SAV) / (OF + SAV)\}$ (Schuster <i>et al.</i> 2014). See Appendix E.
Standing Carbon	Total standing carbon per hectare (Seely 2012)
Carbon Sequestration Potential	Predicted carbon sequestration per hectare in the next 20 years (Seely 2012)
TEM Element Occurrence	Terrestrial ecosystem map (TEM) of the Douglas-fir-Oregon-grape community (a CDF variant) (BC Centre for Conservation Data 2014)
Garry Oak Plant Species	Predicted native species richness of Garry Oak and maritime meadow plants (MacDougall <i>et al.</i> 2006, Bennett and Arcese 2013, Boag 2014). See Appendix F.
SEI	Sensitive Ecosystem Inventory (Province of BC 2011)
Area	Total area target (i.e. Nature Needs Half). Note: Avoid setting this value higher than the biodiversity targets, as Marxan will seek cheap properties to fill the remaining area requirement, regardless of biodiversity value.

2.2.3 Species Penalty Factor

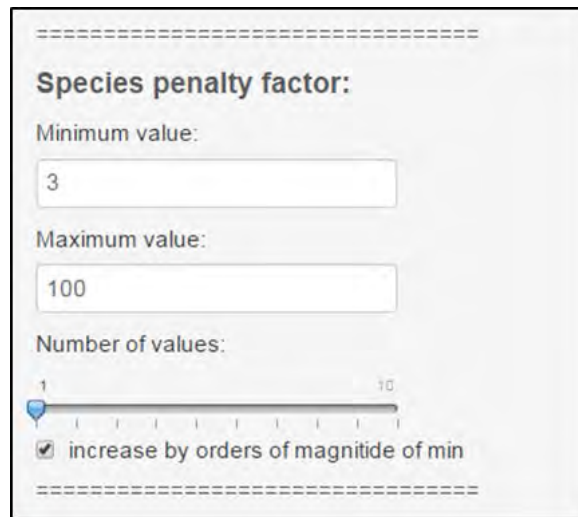


The screenshot shows a configuration window titled "Species penalty factor:". It contains three input fields: "Minimum value:" with the value "3", "Maximum value:" with the value "100", and "Number of values:" with a slider set to 1. Below the slider is a checkbox labeled "increase by orders of magnitude of min" which is checked. The interface is framed by a dashed border.

This section specifies the magnitude of penalty for unmet targets. For example, if only 15% of biodiversity features are included in a configuration when your global target is 17%, then the species penalty factor will determine how harshly you penalize this deficit. A higher SPF value means that Marxan will place a greater importance in solutions that meet targets (versus minimizing cost or boundary length) However, an SPF set too high will be very restrictive and may not allow Marxan to search the sample space efficiently. For more information on this, refer to the Marxan User Manual.

For each section “Species Penalty Factor”, “Connectivity”, and “Iterations” there is a slider “Number of values”. By default this is set to 1, which means that only the value from “Minimum value” will be taken for the Marxan run. In other words, SPF used in the objective function is simply the minimum value. But there is the option to test a range of values for tool calibration. This is important if you have new data or add data layers as this will change outcomes of Marxan runs. By changing the “Number of values” slider to a number greater than one, you are telling Marxan to test that many different SPF values. The values of SPF that will be tested will increase in orders of magnitude of the minimum value as long as the box under the slider remains checked.

For example, if your minimum value for SPF is set to 1, and you set the “Number of values” slider to 3, then Marxan will have to tests SPF values of 1, ($1 * 10^1$) and ($1 * 10^2$), or in other words 1, 10, and 100. The “Maximum value” will place a cap on how high those values can be. As you can probably imagine, testing multiple values increase the computational time, as the scenario will have to be run three times in its entirety, totaling 300 runs if you keep “Number of repeats” at the default. However, it may be useful to test and compare the sensitivity of your study area to changing key variables.


2.2.4 Connectivity

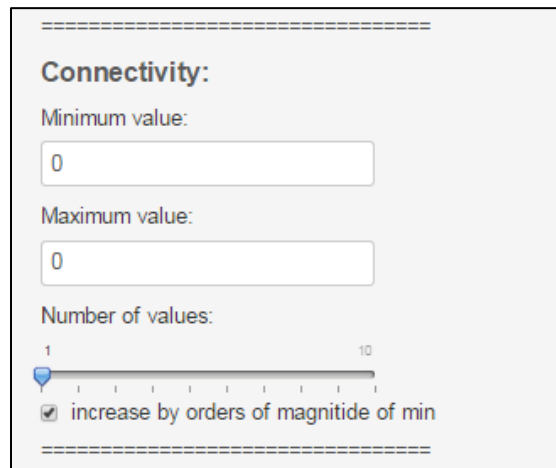

The image shows a software interface for setting connectivity parameters. It is titled "Connectivity:" and has a dashed border. It contains three input fields: "Minimum value:" with the value "0", "Maximum value:" with the value "0", and "Number of values:" with a slider set to 1. Below the slider is a checkbox labeled "increase by orders of magnitude of min" which is checked. The interface is enclosed in a light gray box with a dashed border.

This section will only be included if you have selected “Yes” to “Include connectivity in the analysis” in Global Parameters (See section 2.2.1). If you have done so, then you can change the “Minimum value” to the boundary length modifier (BLM) of your choice. You may want to start by setting it to 1. As with the Species Penalty Factor section (2.2.3) you can test a range of values by setting the “Number of Values” slider to a number greater than one and keeping the box beneath checked.

2.2.5 Number of Iterations

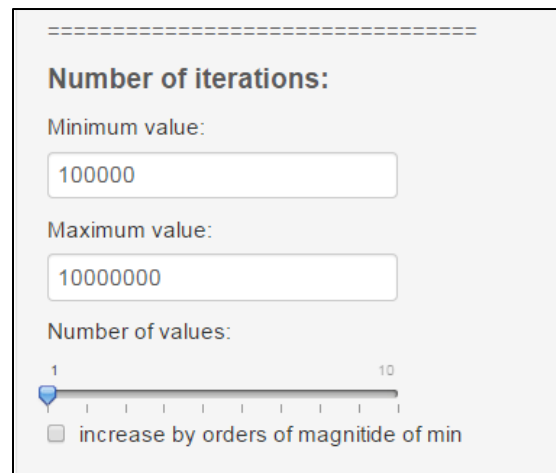

The image shows a software interface for setting the number of iterations. It is titled "Number of iterations:" and has a dashed border. It contains three input fields: "Minimum value:" with the value "100000", "Maximum value:" with the value "10000000", and "Number of values:" with a slider set to 1. Below the slider is a checkbox labeled "increase by orders of magnitude of min" which is unchecked. The interface is enclosed in a light gray box with a dashed border.

This section specifies how many iterations Marxan will test per run. Each iteration is a specific configuration of planning units, so the more iterations that are tested, the greater the likelihood that Marxan will find a configuration with a low objective function score. The Marxan Good Practices Guide suggests a minimum of 100000 iterations to ensure sufficient exploration of the sample space, which is why we have selected this as the default level. Increasing this value will increase the computational time but may allow Marxan to find a solution with a lower score. As with Species Penalty Factor and Connectivity, you can test a number of different values by setting the “Number of Values” slider to greater than 1.

2.3 Running Marxan and Interpreting the Results

A rectangular button with a light gray background and a thin border. The text "Run Marxan" is centered on the button in a bold, black, sans-serif font.

Once you're satisfied that the settings for key variables meet your project requirements, you can click the "Run Marxan" button, and a solution for each run will be calculated, as well as a best overall solution.

This computation can take anywhere from 30 seconds to 30 minutes or more, depending on how much you are asking it to do. Since all of the calculations are done on an external server, you don't have to worry about your own computer's computational capacity. When the calculations are complete, the results section will be populated with plots and tables. We'll go through each component and provide a basic explanation. For additional information you may want to consult the Marxan User Manual.

2.3.1 Scenario name

The tool automatically creates a **run name** for each set of runs with the same parameters, which will look something like this:

S3_B1_I1e+05

S stands for species penalty factor, the number after that for its value.

B stands for boundary length modifier (the connectivity value), the number after that for its value.

I stands for number of iterations, the number after that for its value.

2.3.2 Summary Tables

The tool presents two key table types to summarize the results of the Marxan session, and these can be viewed in the lower half of the results section. First, the overall summary table for the whole session, which appears automatically under the "Summary" tab. This summary table provides you with the average or count values for performance in cost, connectivity, and meeting targets across all runs with the same parameters.

The second type of table summarizes the performance of the solution from each run. If you are testing multiple values of SPF, BLM, or iterations, you will get one table for each set of parameters. This table is in the same format as the summary table and can be viewed under the tab labelled with the run name (ex. S3_B1_I1e+05). **Note: If you don't see a scroll bar, use the arrow keys to scroll left and right on the table.**

Table 2. Summary Table Headers and explanation


Runname	The name given to a set of runs with the same parameters
Score	The average objective function score across all solutions.
Cost	The average cost across all solutions. Measured in units of area, assessed value, or human score (see section 2.2.1)
Pus	The average number of planning units (or land parcels) selected in solutions
B_length	The average total boundary length across all solutions
Penalty	The average penalty (determined as the sum of (SPF * the amount of each feature that is missing from meeting the targets)) across all solutions
Shortfall	The average shortfall (The amount by which the target (s) have not been met in the solution for a run) across all solutions
Missing_Values	The sum of runs with solutions that did not meet the targets
MPM	The sum of the “Minimum proportion met” value

Table 3. Run Solutions Table Headers and explanation

Run_Number	Which of the repeat runs the output refers to
Score	The overall objective function score for the solution for that run
Cost	The sum of the cost of each planning unit selected for the solution
PU's	The number of planning units contained in the solution for that run
Connectivity	The sum of the planning boundaries that form the perimeter/edge of the solution for that run.
Penalty	The sum of (SPF * the amount of each feature that is missing from meeting the targets) for the solution for that run
Shortfall	The amount by which the target (s) have not been met in the solution for that run, expressed as a proportion.
Missing_Values	Whether or not the solution has met the target (s)
MPM	The “minimum proportion met” value, or in other words, the proportion of the worst achieving feature contained within a solution for a run.


2.3.3 Output plots

Cost (SPF)

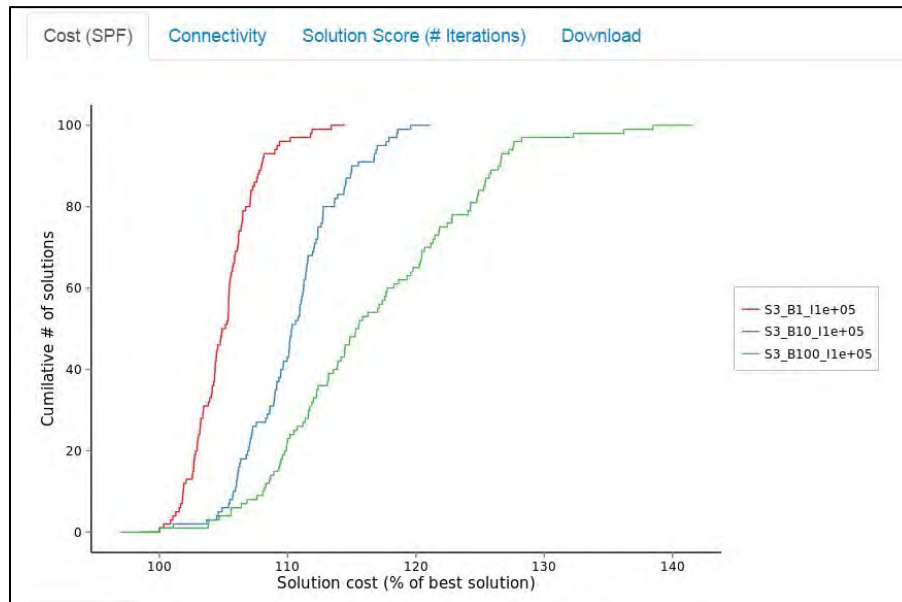


This is the first plot you'll see when Marxan finishes computing. It shows the cumulative number of solutions with a cost greater than that of the best solution. In this case, the reference level for the cost of the best solution is 100%, and every other solution will have a cost larger than this, adding up until all 100 runs are accounted for. The shape of this curve can tell you how much variation in cost there is between solutions, which can be important for calibrating SPF values. Calibration of the appropriate SPF can be tricky, so users should consult the manual for guidance or accept the values included in the tool, which are currently set to appropriate values.

Connectivity

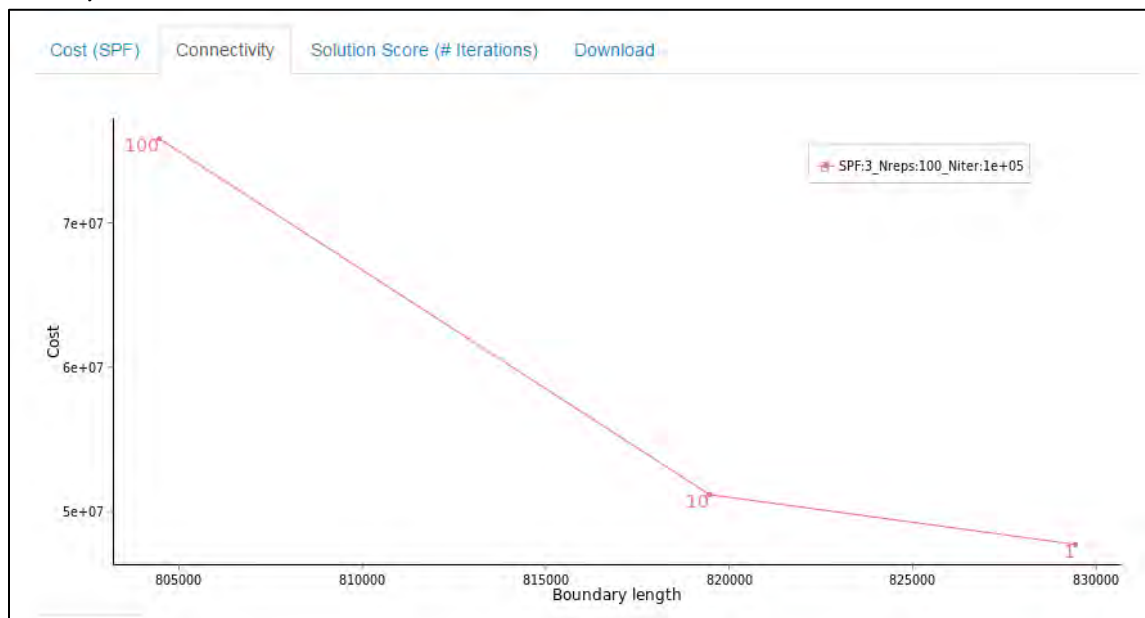

The second tab in the results section will show you a plot comparing cost versus boundary length for the BLM values. This will be important if you are testing a number of different BLM values (See section 2.2.4). Depending on how you set your other parameters, it will look something like the above figure, which results from setting Minimum Value to “1”, Maximum Value to “0”, Number of Values to “3”, and keeping all other values at default levels.

Solution Score (#Iterations)

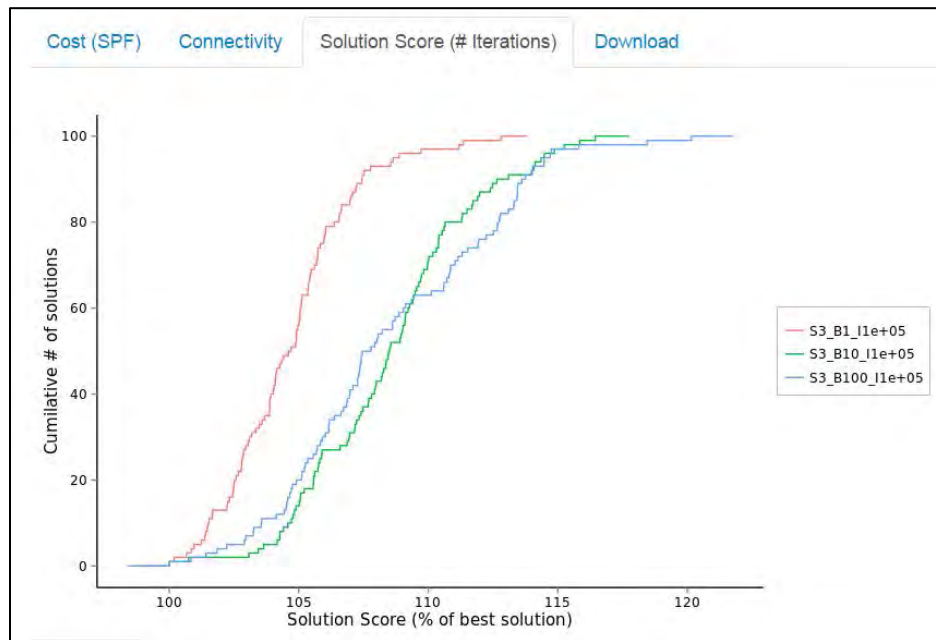

Like the cost plot, this plot shows the cumulative number of solutions that have a value greater than that of the best solution. In this case, the value is the overall objective function score, expressed as percentage larger than the best solution score. Again, the changing parameters can be seen to change the shape of the curve.

2.4 Downloading and Viewing MARXAN results in ArcMap

The table that will be the most useful for visualizing your results is the “**Summary Attribute Table**” located under the “Download” tab. This is an attribute table with the summed solutions and best solution that you can join to the CDFCP shapefile. The column header with a “_B” after the run name is the scenarios best overall solution, expressed as 0 or 1 depending on whether the planning unit was chosen. The column header with no “_B” after the run name gives the selection frequencies of planning units out of 100 runs (or however many runs were requested)

The other table is the “**Individual Runs Attribute Table**”. This is similar to the previous output, but instead of including the selection frequency of parcels or the best run, the solutions for all 100 runs of a scenario are included (_r001 - _r100) in the attribute table. This table will likely be less useful to you but you can still choose to join it to the CDFCP shapefile in ArcMap for a more detailed look at the solutions for individual runs.

To start, download the “**Cadastral Fabric**” (property parcel layer for the CDFCP). Also download the “Summary attribute table”.

To display Marxan outputs correctly, you will have to load the cadastral fabric and then join the results attribute table to that layer. This step can be a bit tricky, because you are joining a .csv file to the cadastral shapefile. To do so, first create a **'File Geodatabase'** in ArcCatalog or the Catalog tab of ArcMap. You can do this by browsing to your desired folder location in the Catalog, right clicking and selecting **New → File Geodatabase**. Next, browse to the downloaded Summary attribute table from the online tool. Right click on that and select **Export → To Geodatabase (single)**. A 'Table to Table' tool interface will pop up. For the 'Output Location' select the recently created 'File Geodatabase'.

Next, in ArcMap right click the cadastral fabric you added, select **Joins and Relates → 'Join...'**. In the first drop down menu, select **'Join attributes from a table'**. In the following list of numbered items choose:

1. RS_ID
2. Browse to the Marxan output table in the Geodatabase
3. ID (or PUID if you are working with the individual runs table)

And finally in the 'Join Options' select 'Keep only matching records'. Click OK and the Marxan results will be joined to the cadastral fabric. To save this join right click the 'cadastral fabric' again and select **Data → 'Export Data...'**. Choose file name and location, press OK and after the export is finished select to 'Add layer...'.

On this new layer right click and select properties. In the **'Symbology'** tab select 'Quantities'. In the Value drop down menu select the run name of your choice and set up a color ramp for display.

3. References

- Bennett, J.R. 2013, Comparison of native and exotic distribution and richness models across scales reveals essential conservation lessons. *Ecography* 36: 1-10.
- Bennett, J.R., and P. Arcese. 2013. Human influence and classical biogeographic predictors of rare species occurrence. *Conservation Biology* 0: 1-5.
- Boag, A.E. 2014. Spatial models of plant species richness for British Columbia's Garry oak meadow ecosystem. Master's thesis, University of British Columbia.
- Heilman, G.E., J.R. Stritthold, N.C. Slosser, and D.A. Dellasala. 2002. Forest fragmentation of the conterminous united states: assessing forest intactness through road density and spatial characteristics. *BioScience* 52: 411-422.
- MacDougall, A.S., J. Boucher, R. Turkington, and G.E. Bradfield. 2006. Patterns of plant invasion along an environmental stress gradient. *Journal of Vegetation Science* 17: 47-56.
- Schuster, R., and P. Arcese. 2012. Using bird species community occurrence to prioritize forests for old growth restoration. *Ecography* 35: 1-9.
- Schuster, R., T.G. Martin, P. Arcese. 2014. Bird community conservation and carbon offsets in Western North America. *PLOS ONE* 9: 1-9.
- Seely, B. 2012. Evaluation of carbon storage within forests in the Coastal Douglas Fir zone. 14 pages.

4. Additional Resources

Marxan User Manual:

Ball, I.R., and H.P. Possingham, 2000. MARXAN (V1.8.2): Marine Reserve Design Using Spatially Explicit Annealing, a Manual.

Marxan Good Practices Handbook:


Ardron, J. H.P. Possingham and C.J. Klein (Eds.), Version 2, 2010. Marxan good practices handbook. University of Queensland, St. Lucia, Queensland, Australia, and Pacific Marine Analysis and Research Association, Vancouver, British Columbia, Canada.

Another great resource is the tutorial available on the Marxan website, which goes through much of the same material in greater detail:

<http://www.uq.edu.au/marxan/tutorial/toc.html>


5. Appendices

Appendix A. Old Forest Community Occurrence Map

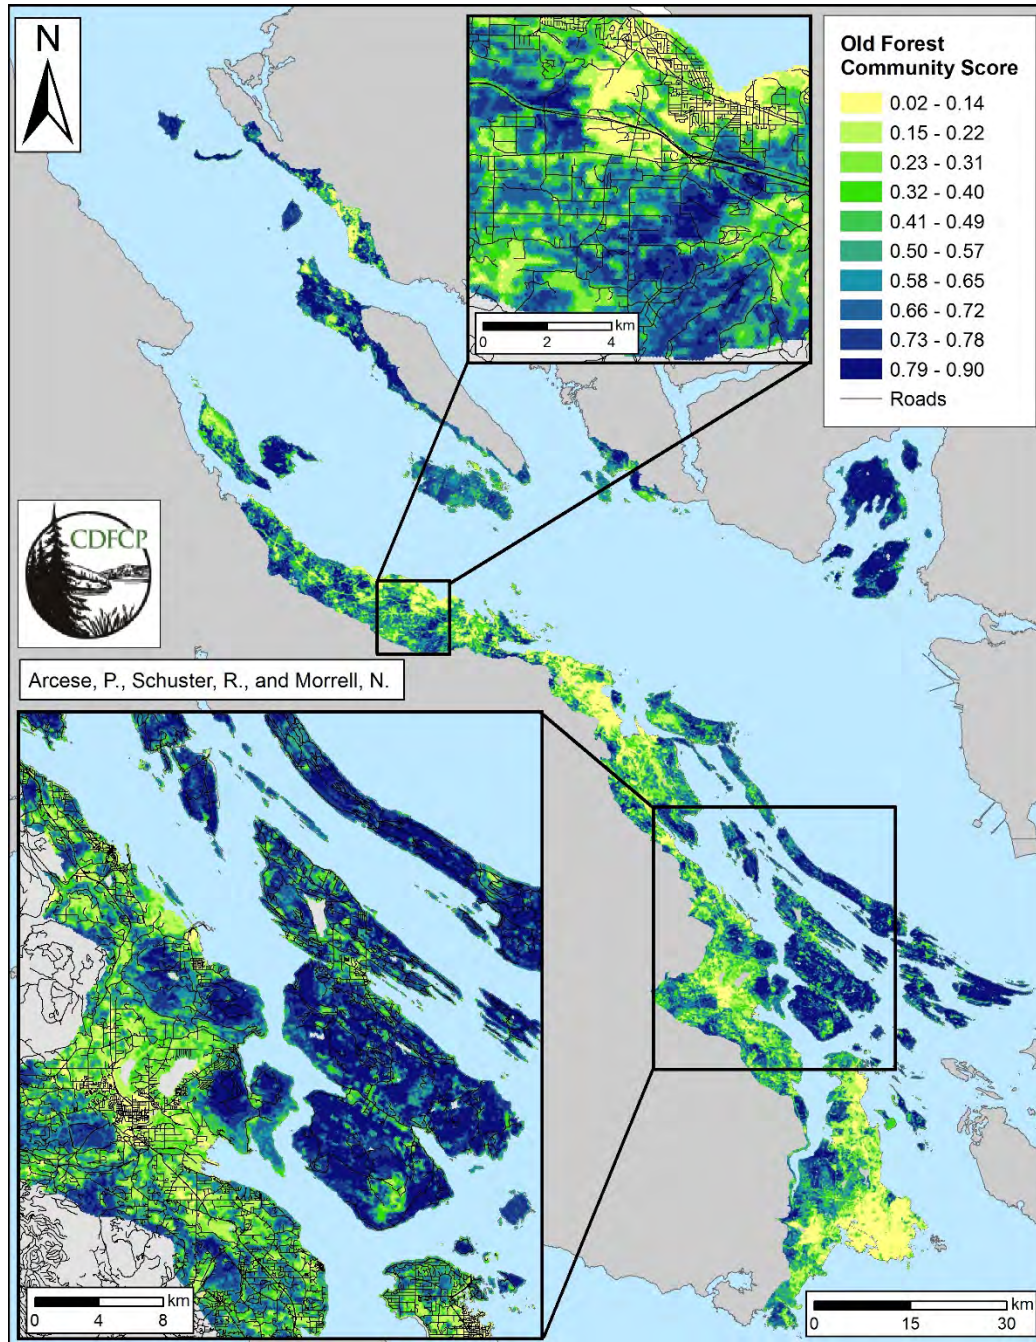


Composite distribution map based on probability of occurrence of birds typically associated with old forest habitat (Schuster and Arcese 2014).

Appendix B. Savannah Community Occurrence Map

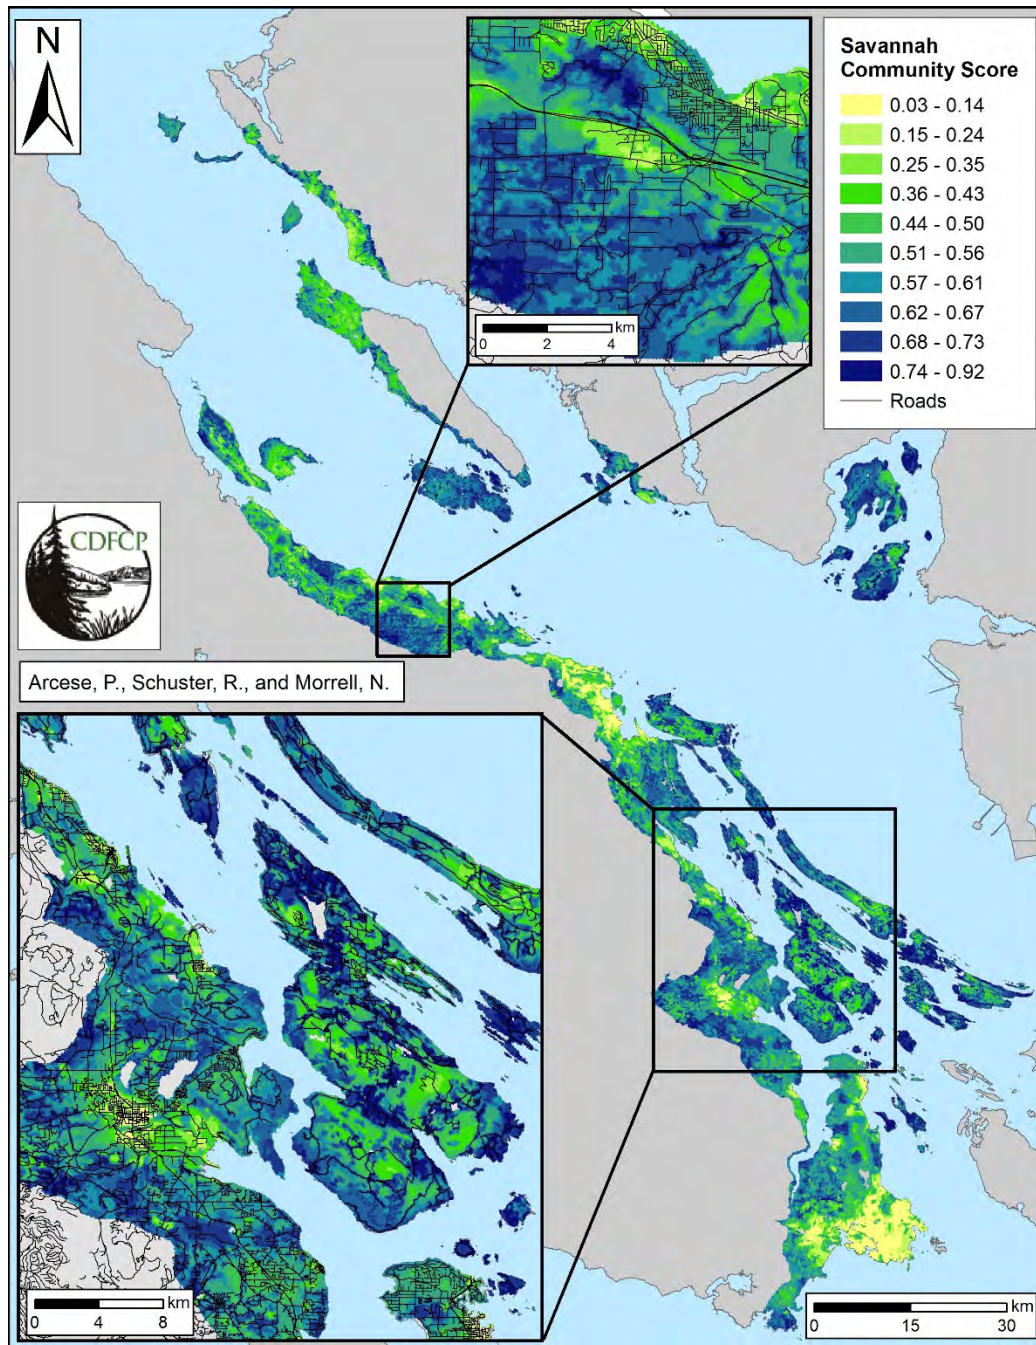


Composite distribution map based on probability of occurrence of birds typically associated with savannah habitat (Schuster and Arcese 2014).

Appendix C. Wetland Community Occurrence Map

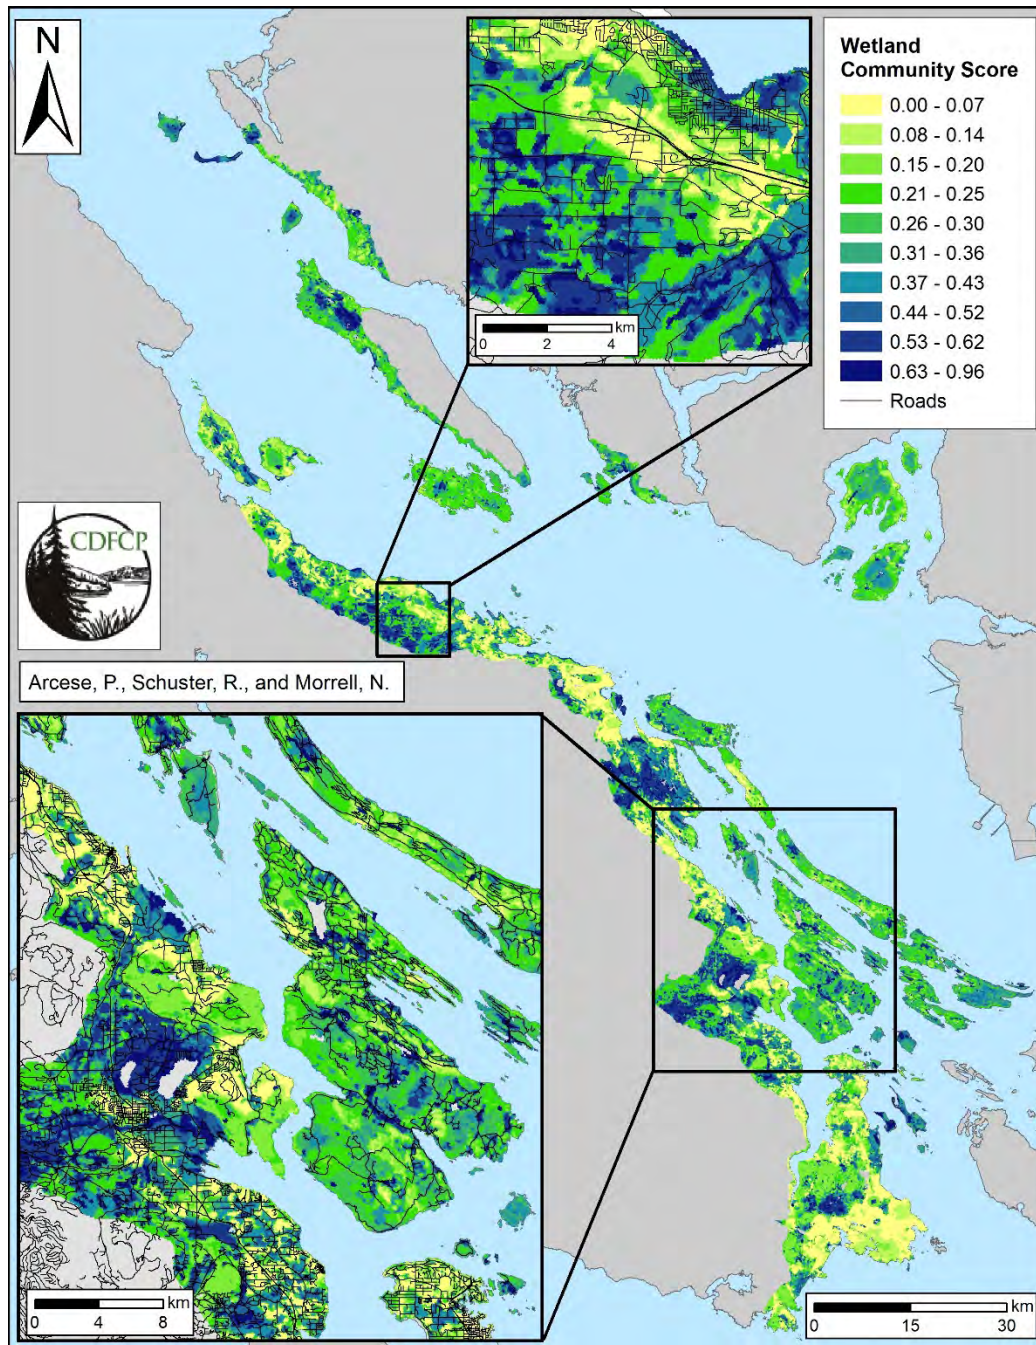


Composite distribution map based on probability of occurrence of birds typically associated with wetland and riparian habitats (Schuster and Arcese, unpublished)

Appendix D. Human Commensal Birds Community Occurrence Map

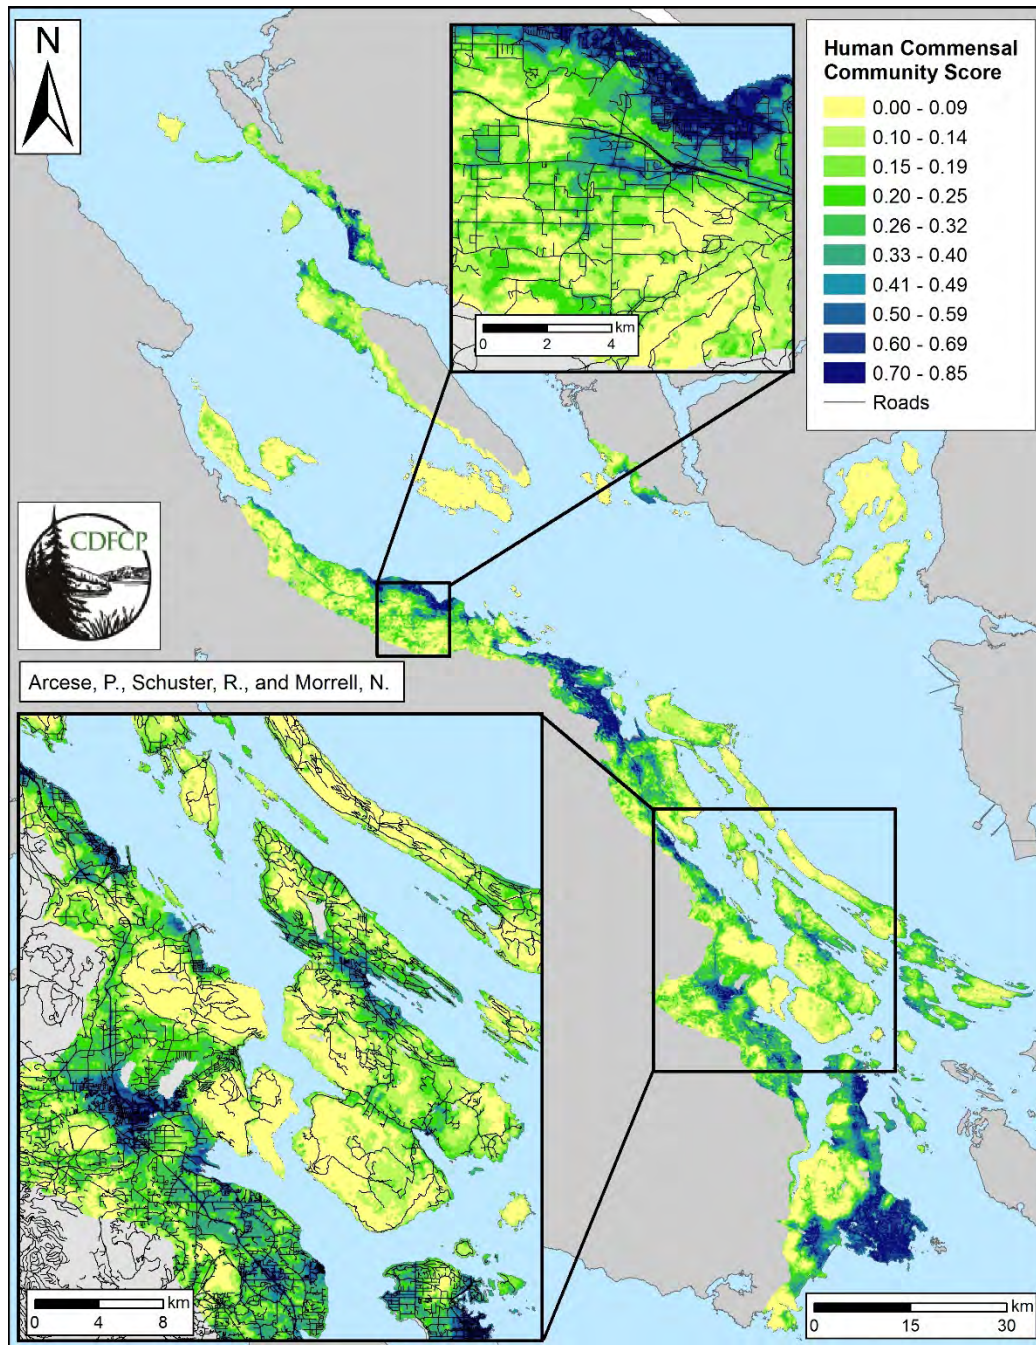


Composite distribution map based on probability of occurrence of birds typically associated with urban and rural human landscapes (Schuster and Arcese, unpublished).

Appendix E. Old Forest and Savannah Beta Diversity Map

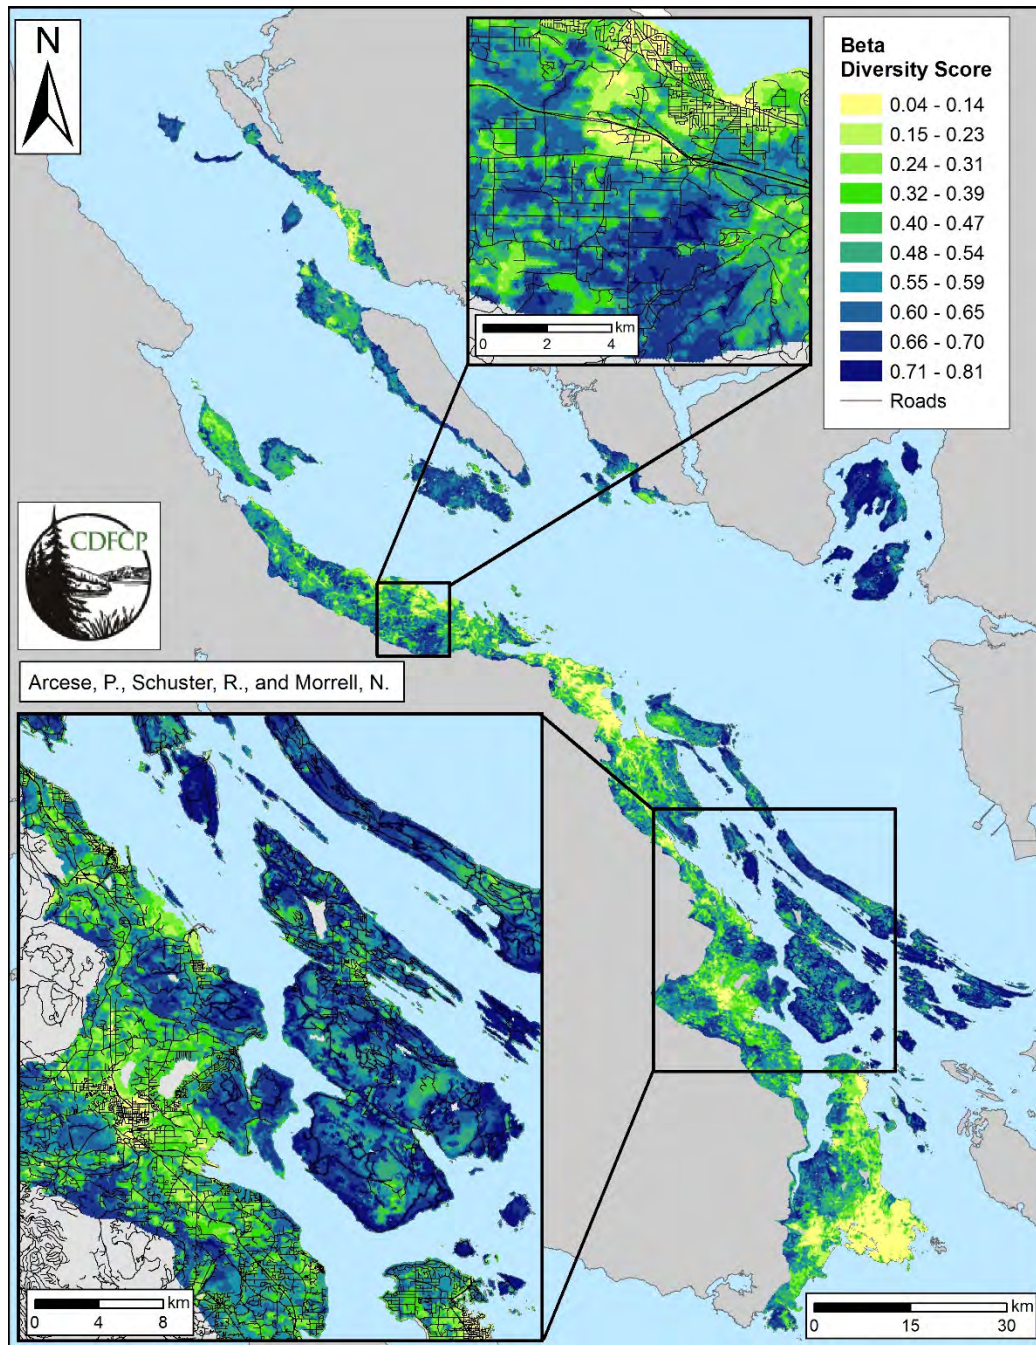


Both savannah and old forest communities. Calculated using the formula $\{\beta = (2+OF+SAV) / (OF + SAV)\}$ (Schuster *et al.* 2014).

Appendix F. Garry Oak Ecosystem Plant Native Species Richness Map

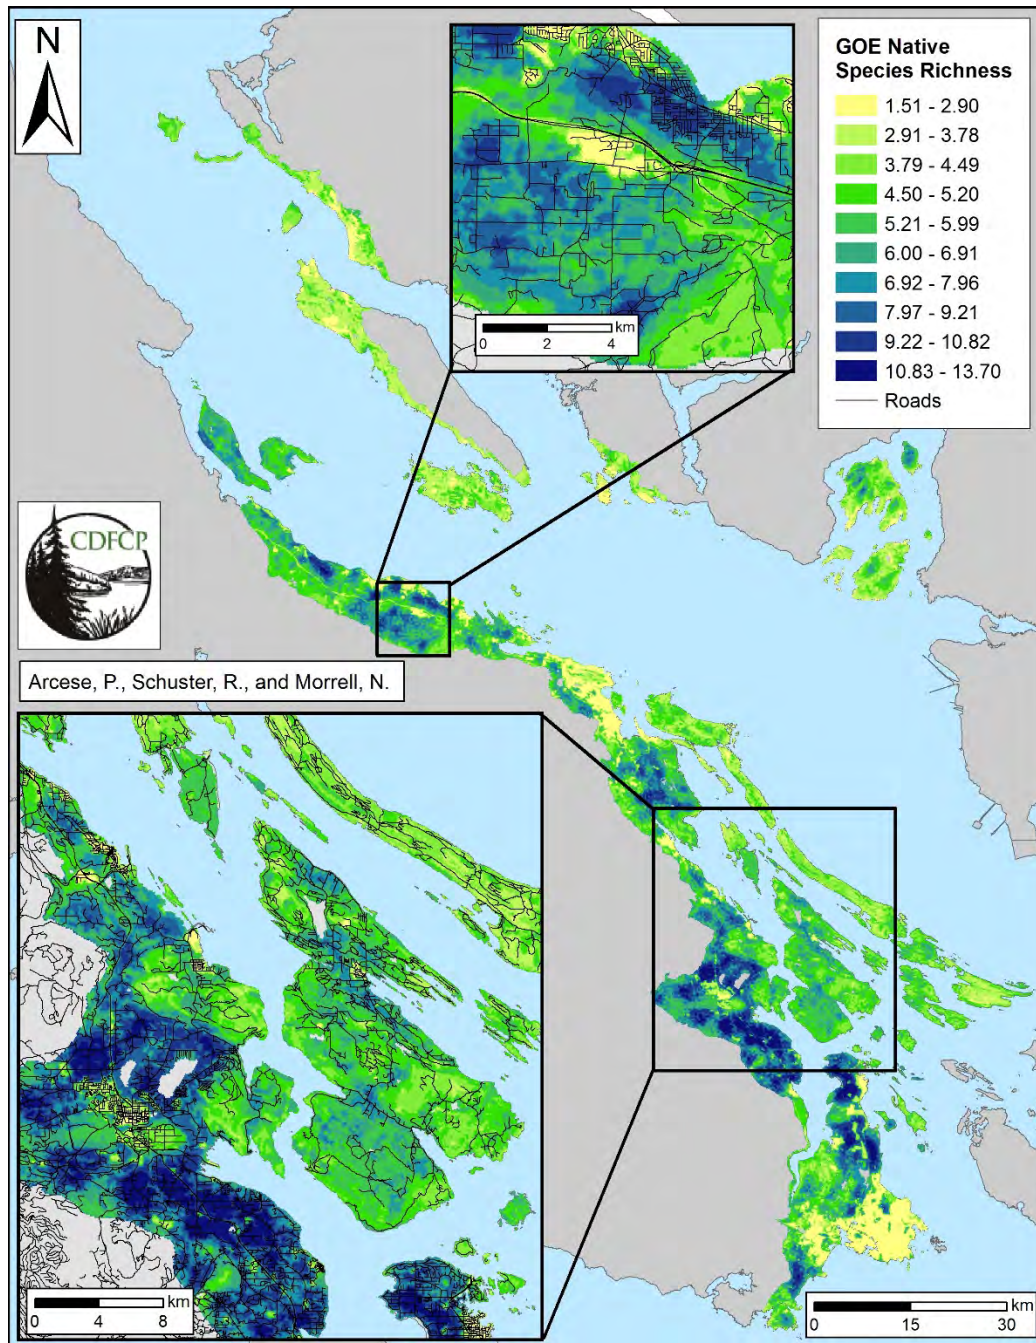


Predicted species richness of native Garry Oak and maritime meadow plants (MacDougall *et al.* 2006, Bennett and Arcese 2013, Boag 2014).

Appendix G. Example Maps - Locking In vs. Not Locking In Parks

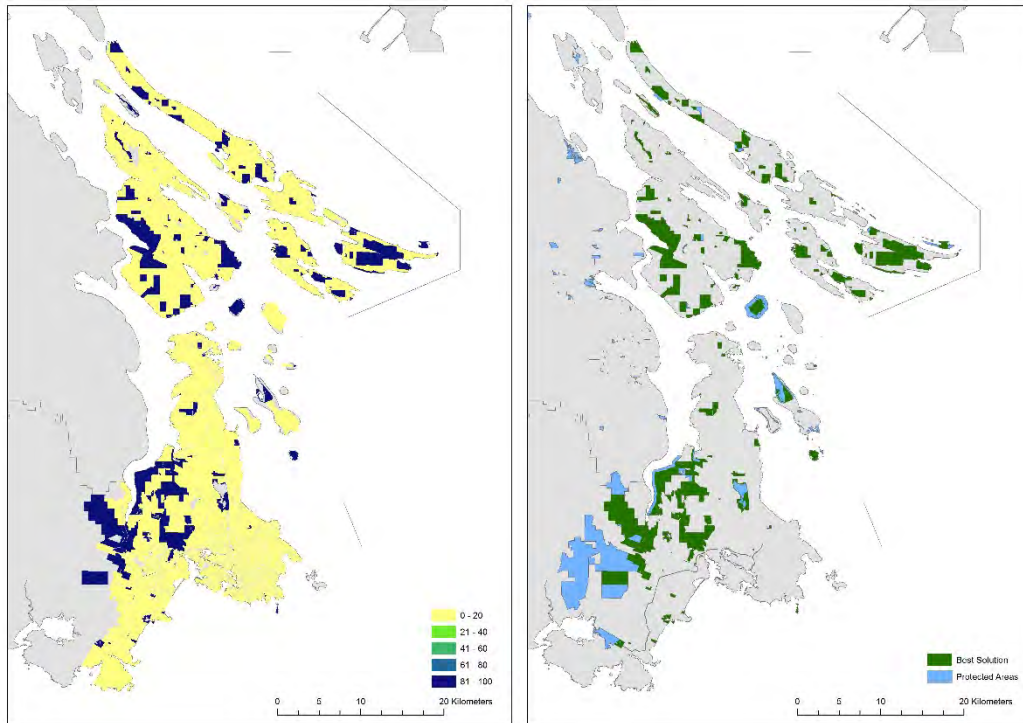

Selection frequency map and best solution map for a Marxan simulation on the Capital Regional District with the following specs: Parks Locked in – **Yes**; 100 Runs ; BLM set at 10; SPF set at 3; 100 000 iterations

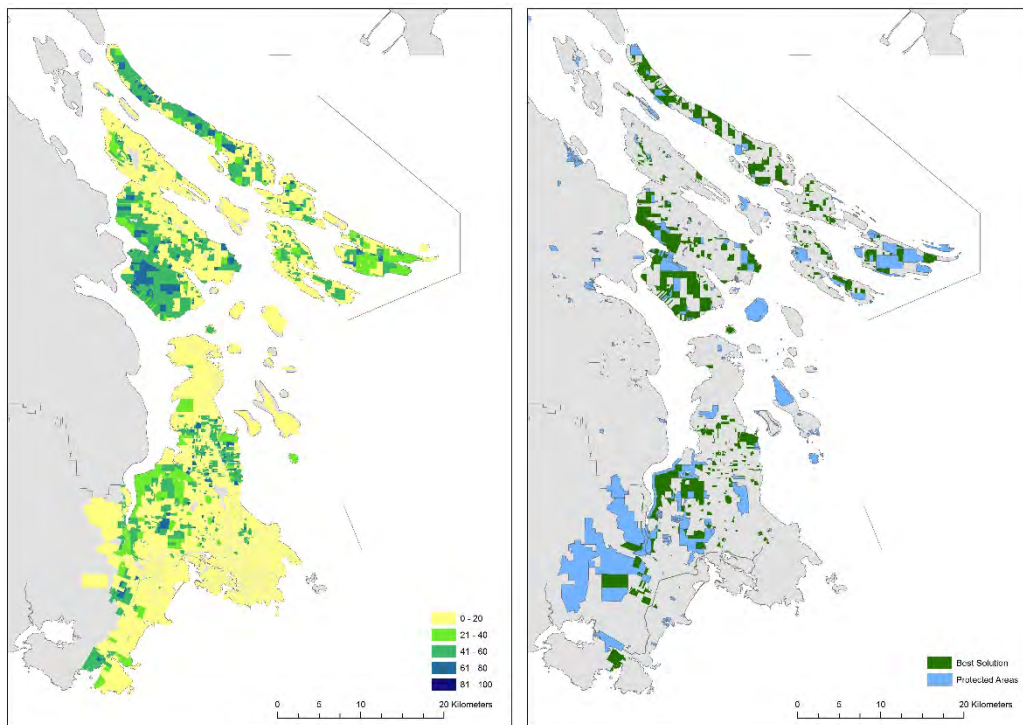

Selection frequency map and best solution map for a Marxan simulation on the Capital Regional District with the following specs: Parks Locked in – **No**; 100 Runs ; BLM set at 10; SPF set at 3; 100 000 iterations